
DIGITAL OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS

IP65 WATERPROOF


DATA OUTPUT

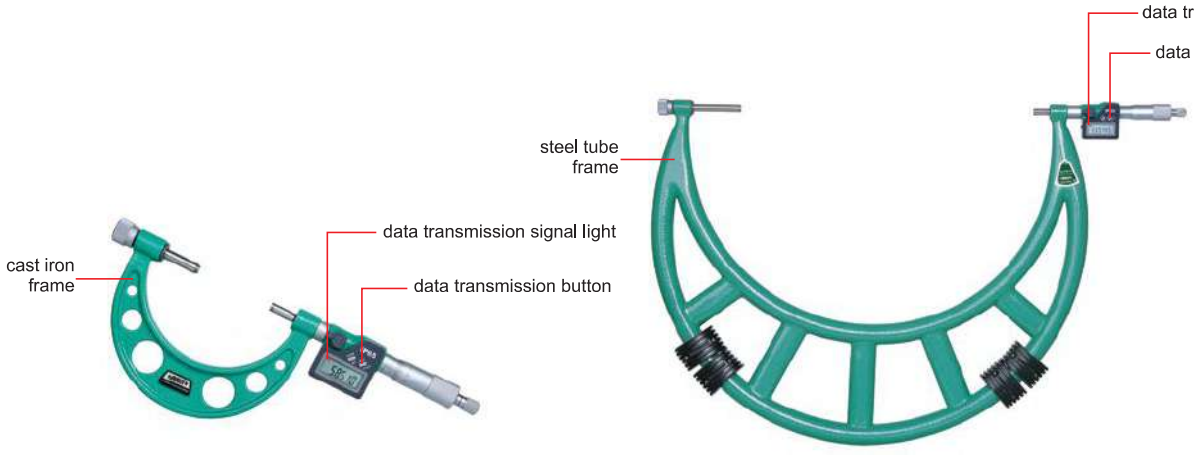

3506-100A


3506-400A

Unit: mm

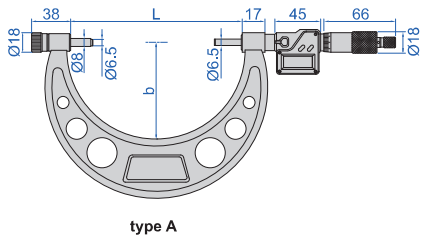


type A

Unit: mm

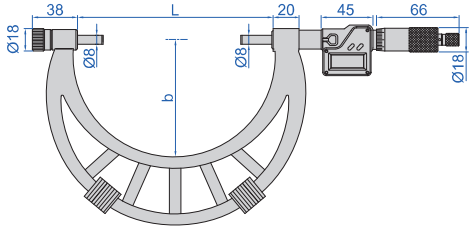

type B

- Resolution 0.001mm/0.0001" (resolution of **3506-100A/100AWL** and **3506-150A/150AWL** is 0.001mm/0.00005")
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Power:
  with data interface: CR2032
  built-in wireless: rechargeable lithium battery



interchangeable anvils (included) for different measuring ranges



setting standard (included)

With data interface (data output cable code 7315-31 and receiver is required page 4, **7302-31** page 12, **optional)** **(mm)**

Code	Range	Type	Accuracy	L	b	Setting standard (included)
3506-100A	0-100mm/0-4"	A	±5μm	105	57	25, 50, 75
3506-150A	0-150mm/0-6"	A	±6μm	155	82	25, 50, 75, 100, 125
3506-300A	150-300mm/6-12"	A	±8μm	305	165	150, 175, 200, 225, 250, 275
3506-301A	200-300mm/8-12"	A	±8μm	305	165	200, 225, 250, 275
3506-400A	300-400mm/12-16"	B	±9μm	405	224	325, 375
3506-500A	400-500mm/16-20"	B	±11μm	505	275	425, 475
3506-600A	500-600mm/20-24"	B	±12μm	605	321	525, 575
3506-700A	600-700mm/24-28"	B	±13μm	705	371	625, 675
3506-800A	700-800mm/28-32"	B	±15μm	805	426	725, 775
3506-900A	800-900mm/32-36"	B	±16μm	905	476	825, 875
3506-1000A	900-1000mm/36-40"	B	±17μm	1005	576	925, 975

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required)

Code
3506-□□□□WL

Code examples:

Original code	Wireless code
3506-100A	3506-100AWL
3506-150A	3506-150AWL