# OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS

- Graduation 0.01mm
- Ratchet stop
- Meet DIN863-3
- Carbide measuring faces
- Supplied with setting standards


interchangeable anvils (included) for different measuring ranges



3206-150A




3206-400


setting standard (included)


(mm)

| Code | Range | Type | Accuracy | L | b | Setting standard (included) |
|---|---|---|---|---|---|---|
| **3206-50A** | 0-50mm | A | 4μm | 58 | 35 | 25 |
| **3206-100A** | 0-100mm | A | 5μm | 108 | 57 | 25, 50, 75 |
| **3206-150A** | 0-150mm | A | 6μm | 158 | 82 | 25, 50, 75, 100, 125 |
| **3206-151A** | 50-150mm | A | 6μm | 158 | 82 | 50, 75, 100, 125 |
| **3206-200A** | 100-200mm | A | 7μm | 208 | 114 | 100, 125, 150, 175 |
| **3206-300A** | 150-300mm | A | 9μm | 308 | 165 | 150, 175, 200, 225, 250, 275 |
| **3206-301A** | 200-300mm | A | 9μm | 308 | 165 | 200, 225, 250, 275 |
| **3206-400** | 300-400mm | B | 11μm | 409 | 224 | 325, 375 |
| **3206-500** | 400-500mm | B | 13μm | 509 | 275 | 425, 475 |
| **3206-600** | 500-600mm | B | 14μm | 609 | 321 | 525, 575 |
| **3206-700** | 600-700mm | B | 16μm | 709 | 371 | 625, 675 |
| **3206-800** | 700-800mm | B | 18μm | 809 | 426 | 725, 775 |
| **3206-900** | 800-900mm | B | 20μm | 909 | 476 | 825, 875 |
| **3206-1000** | 900-1000mm | B | 22μm | 1009 | 576 | 925, 975 |

Unit: mm

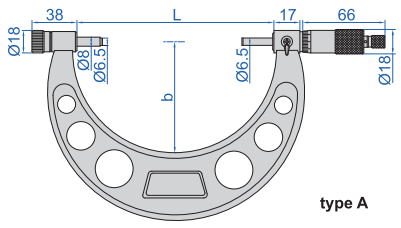

type A

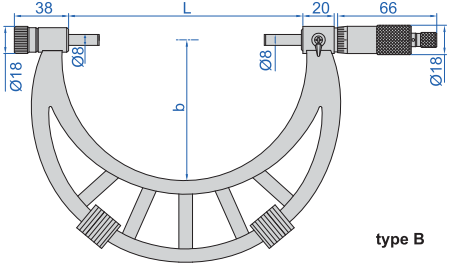

type B