DIGITAL CYLINDRICAL ANVIL TUBE MICROMETERS


IP65 WATERPROOF

DATA OUTPUT


- Measure wall thickness of tubes
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Carbide spindle tip
- Supplied with setting standards (except 0-25mm/0-1")
- Power:
  with data interface: CR2032
  built-in wireless: rechargeable lithium battery



3561-25A




Unit: mm



With data interface
(optional data output cable: code 7315-31 receiver is needed, 7302-31)

(mm)

Code	Range	Type	Accuracy	L	b
3561-25A	0-25mm/0-1"	A	±6μm	36	25
3561-50A	25-50mm/1-2"	A	±6μm	61	32
3561-25BA	0-25mm/0-1"	B	±6μm	36	25
3561-50BA	25-50mm/1-2"	B	±6μm	61	32
3561-25CA	0-25mm/0-1"	C	±6μm	36	25
3561-50CA	25-50mm/1-2"	C	±6μm	61	32
3561-25DA	0-25mm/0-1"	D	±6μm	36	25
3561-50DA	25-50mm/1-2"	D	±6μm	61	32
3561-25EA	0-25mm/0-1"	E	±6μm	36	25
3561-50EA	25-50mm/1-2"	E	±6μm	61	32
3561-25FA	0-25mm/0-1"	F	±6μm	36	25
3561-50FA	25-50mm/1-2"	F	±6μm	61	32

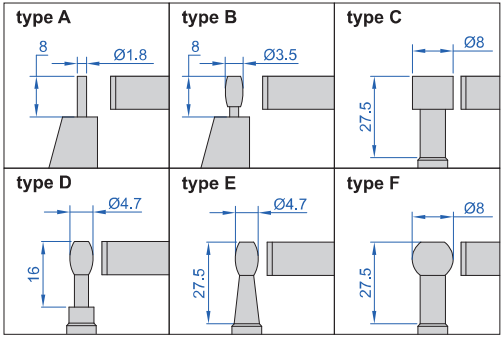

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

Code
3561-□□□□WL

Code examples:

Original code	Wireless code
3561-25A	3561-25AWL
3561-25BA	3561-25BAWL