
PORTABLE LEEB HARDNESS TESTER
CODE ISH-SPHD

MANUFACTURER INSPECTION CERTIFICATE

DATA OUTPUT



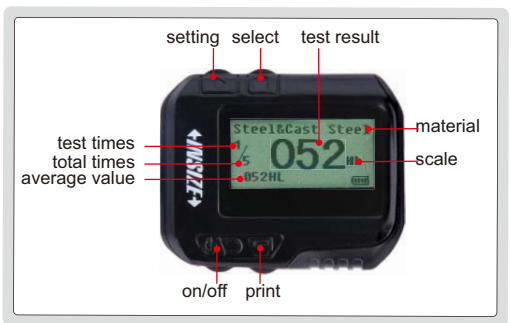

- Impact device D
- Based on Leeb(HLD), converted to Vickers(HV), Brinell(HB), Rockwell(HRC and HRB), Shore(HS) and tensile strength(MPa)
- Automatic direction correction
- Connected with printer via bluetooth
- Connected with computer via USB port
- Up to 500 test results can be saved
- According to ASTM A 956

included



printer



hardness test block D



small support ring

SPECIFICATION

Min. reading	1HLD, 1HV, 1HB, 0.1HRC, 0.1HRB, 1HS	
Accuracy	±6HLD (when HLD=800)	
Output	USB and bluetooth	
Applicable workpiece	minimum weight	5kg (direct measurement)
		2kg (on solid support)
		0.1kg (coupled on plate)
	minimum thickness: 5mm	
	minimum radius of curved surface: 30mm	
	maximum roughness(Ra): 1.6μm	
Power supply	built-in rechargeable battery	
Dimension	147×35×22mm	
Weight	65g	

STANDARD DELIVERY

Main unit	1pc
Printer	1pc
Hardness test block D	1pc
Small support ring	1pc
Cleaning brush	1pc
AC/DC adapter	1pc
USB cable and software disc	1pc of each

OPTIONAL ACCESSORY

Couplant	**ISH-COUPLANT**
Support rings	page 362
Hardness test block D	**ISH-BHLD**

APPLICABLE MATERIAL AND HARDNESS RANGE FOR IMPACT DEVICE D

Material	HLD	HV	HB	HRC	HRB	HS
Steel & cast steel	300-900	81-955	81-654	20-68	38-100	32-100
Tool steel	300-840	80-898		20-67		
Stainless steel	300-800	85-802	85-655		46-101	
Cast iron	360-650		93-334			
Cast aluminum alloy	170-570		19-164		23-84	
Brass	200-550		40-173		13-95	
Bronze	300-700		60-290			
Copper	200-690		45-315			