COATING THICKNESS GAUGE (STANDARD TYPE)

VIDEO

INSPECTION CERTIFICATE

FOR MAGNETIC AND NON-MAGNETIC SUBSTRATES

BLUETOOTH

DATA OUTPUT

- Magnetic induction probe (FE) measures the thickness of non-magnetic coating and non-metallic coating on magnetic metal substrate.
  Substrate: iron, steel, magnetic stainless steel (not for non-magnetic stainless steel)
  Coating: zinc, copper, chrome, tin, plastic, powder, paint (not for nickel)
- Eddy current probe (NFE) measures the thickness of non-conductive coating on non-magnetic metal substrate.
  Substrate: copper, aluminum, zinc, non-magnetic stainless steel
  Coating: plastic, powder, paint, anodizing (not for chrome and zinc plating)
- Tolerance measurement
- Data statistic, including average, variance, maximum and minimum values
- Data can be sent to Excel by connecting to computers via bluetooth or cable of receiver
- Support bluetooth printer
- Automatic power off



zero calibration block (included)



calibration foils (included)



receiver (**optional**)



eddy current probe **NFE** with zero calibration block (**9501-1200N** included)



magnetic induction probe **FE10** for large range (**optional**)




magnetic induction probe **FE90** for bores and grooves (**optional**)



9501-1200

Unit: mm

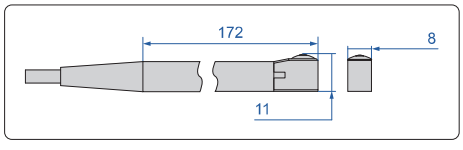

FE90 probe dimension

SPECIFICATION

Code	9501-1200	9501-1200N
Probe	magnetic induction probe	eddy current probe
Measuring range	refer to the specification of probes	
Accuracy	±(3%L+1)μm (range≤1250μm) ±(3%L+10)μm (range>1250μm) L is measuring thickness in μm	
Resolution	0.1μm (range<100μm) 1μm (range≥100μm)	
Measuring mode	continuous and single	
Storage capacity	600	
Output	Type-C	
Power supply	2×1.5V AA batteries	
Dimensions	135×77×32mm	
Weight	172g	

STANDARD DELIVERY

Code	9501-1200	9501-1200N
Magnetic induction probe (9501-1200-FE)	1 pc	-
Zero calibration block for FE probe	1 pc	-
Eddy current probe (9501-1200-NFE)	-	1 pc
Zero calibration block for NFE probe	-	1 pc
Main unit	1 pc	1 pc
Software and USB cable	1 pc	1 pc
Calibration foils (50/100/250/500/1000μm)	1 set	1 set
1.5V AA battery	2 pcs	2 pcs

OPTIONAL ACCESSORY

Code	9501-1200	9501-1200N
Probe	9501-1200-NFE, 9501-1200-FE90, 9501-1200-FE10	9501-1200-FE, 9501-1200-FE90, 9501-1200-FE10
Receiver	ISR-C300-RECEIVER	
Cable of receiver	9501-1200-CABLE	
Bluetooth printer	ISR-C002-PRINTER	

SPECIFICATION OF PROBES

Code	Range	Minimum substrate thickness	Minimum measuring area	Minimum curvature radius of convex workpiece	Probe type
9501-1200-FE	0~1250μm	0.5mm	Ø7mm	1.5mm	magnetic induction probe (**FE**)
9501-1200-NFE	0~1250μm	0.3mm	Ø15mm	3mm	eddy current probe (**NFE**)
9501-1200-FE90	0~1250μm	0.5mm	Ø7mm	——	magnetic induction probe (**FE90**) for bores and grooves
9501-1200-FE10	500μm~10000μm	2mm	Ø40mm	10mm	magnetic induction probe (**FE10**) for large range