BORE GAUGE SETS

ATTENTION: NOT SUITABLE FOR 0.001MM DIAL INDICATORS



2824-S160



2724-S3




2724-S3WP


packaging (code **2824-S3**)



with digital indicator

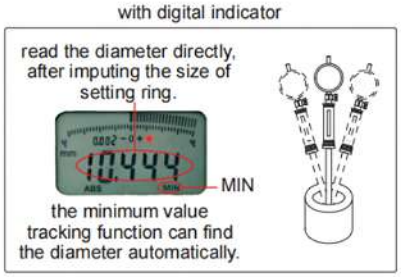

with waterproof digital indicator

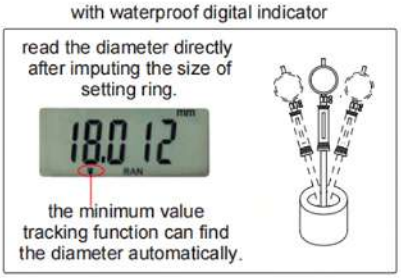

- Optional accessory: setting ring (code **6312**), long handle (code **7351**), bore gauge setter

With dial indicator

Code	Range	Indicator	Bore gauges included	Accuracy	Repeatability
2824-S160	35-160mm	dial indicator, code **2308-10FA**, range 10mm, graduation 0.01mm	①35-50mm (dial indicator and handle are not included) ②50-160mm	35-50mm ±0.018mm 50-160mm ±0.018mm	0.003mm
2824-S3	18-160mm	dial indicator, code **2308-10FA**, range 10mm, graduation 0.01mm	①18-35mm ②35-60mm (dial indicator is not included) ③50-160mm (dial indicator is not included)	18-35mm ±0.015mm 35-60mm ±0.018mm 50-160mm ±0.018mm	0.003mm

With digital indicator (data output cable code 7315-51B, 7302-40M, optional)

Code	Range	Indicator	Bore gauges included	Accuracy	Repeatability
2724-S160	35-160mm	digital indicator, code **2108-10F** range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	①35-50mm (digital indicator and handle are not included) ②50-160mm	35-50mm ±0.018mm 50-160mm ±0.018mm	0.003mm
2724-S3	18-160mm	digital indicator, code **2108-10F** range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	①18-35mm ②35-60mm (digital indicator is not included) ③50-160mm (digital indicator is not included)	18-35mm ±0.015mm 35-60mm ±0.018mm 50-160mm ±0.018mm	0.003mm

With waterproof digital indicator (data output cable code 7315-51B, 7302-40M, optional)

Code	Range	Indicator	Bore gauges included	Accuracy	Repeatability
2724-S160WP	35-160mm	waterproof digital indicator, code **2137-10F**, range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	①35-50mm (digital indicator and handle are not included) ②50-160mm	35-50mm ±0.018mm 50-160mm ±0.018mm	0.003mm
2724-S3WP	18-160mm	waterproof digital indicator, code **2137-10F**, range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	①18-35mm ②35-60mm (digital indicator is not included) ③50-160mm (digital indicator is not included)	18-35mm ±0.015mm 35-60mm ±0.018mm 50-160mm ±0.018mm	0.003mm