
DATA OUTPUT

DISPLAY MAXIMUM, MINIMUM, DIFFERENCE VALUE BETWEEN MAXIMUM AND MINIMUM

DIGITAL SURFACE PROFILE GAGE


measure peak-to-valley height of blast cleaned surfaces





2844-10

Unit: mm

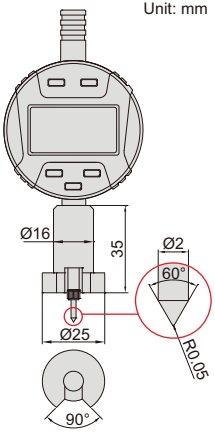

VIDEO

- Measure peak-to-valley height of blast cleaned surface.
  If the profile is too low, the adhesion of the coating to the surface will be reduced.
  If the profile is too high, there is the danger that the profile peaks will remain uncoated, allowing rust spots to occur.
- Meet ASTM D 4417-B
- Zero set block is included, set zero before measurement
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- CR2032 battery, automatic power off (time is adjustable)
- Data ouput
- Stainless steel base
- Optional accessory: data output cable (code **7315-50M, 7302-40M**)

set zero



zero set block (included)

Code	Range	Digital indicator stroke	Digital indicator resolution	Accuracy
2844-10	0-12.7mm/0-0.5"	12.7mm/0.5"	0.001mm/0.00005"	±0.005mm