

QUICK POSITIONING CONCENTRICITY GAGES


QUICK-POSITIONING, SUITABLE FOR MASS MEASUREMENT

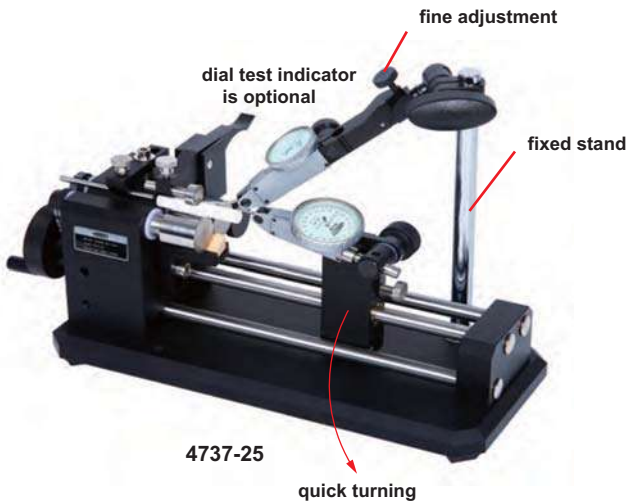

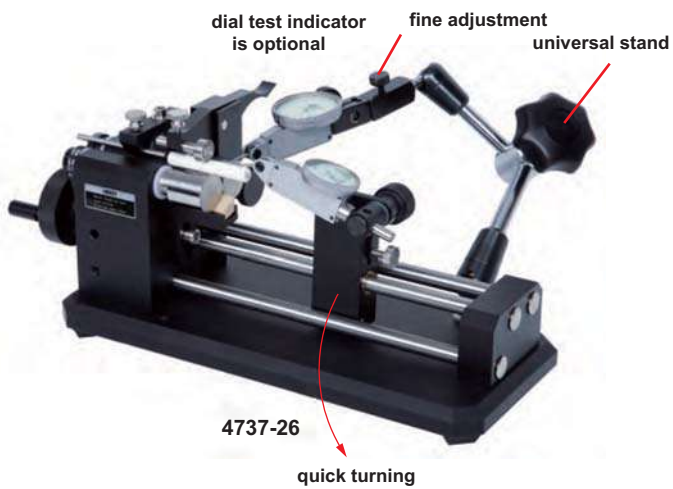


- Quick positioning, suitable for mass measurement
- Supplied with standard rod to verify accuracy
- Optional accessory: dial test indicators

to ensure the accuracy 2μm, the distance between measuring point and roller should be <30mm

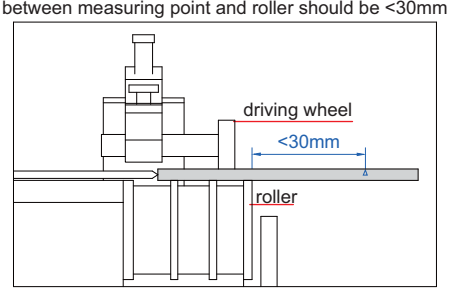

standard rod(included)



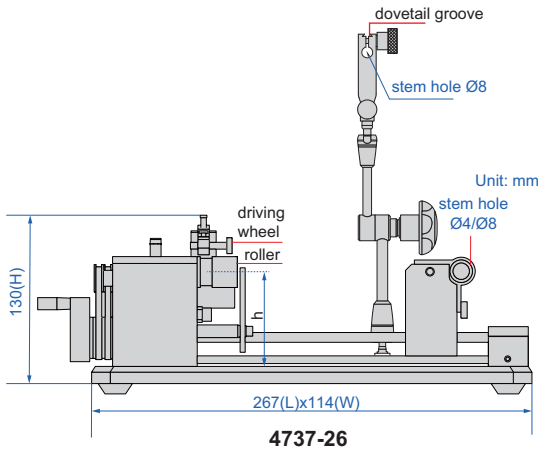

4737-26

Code	Diameter range	Workpiece length	Accuracy	Center height (h)	L×W×H	Weight	Remark
4737-25	Ø3-25mm	15-100mm	2μm	70mm	267×114×130mm	3kg	fixed stand, high accuracy, inconvenient operation
4737-26	Ø3-25mm	15-100mm	2μm	70mm	267×114×130mm	3kg	universal stand, low accuracy, convenient operation