HORIZONTAL PROFILE PROJECTORS

INSPECTION CERTIFICATE

VIDEO




ISP-W3020



ISP-A3000E

digital readout of **ISP-A3000E**

- touch buttons
- USB data output to Excel and CAD
- show diagram

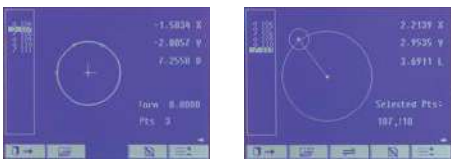



software flash disk (included, only for **ISP-A3000E**)

OPTIONAL ACCESSORY



lens




overlay chart (protractor with 1° graduation, radius with 1mm increment)



50mm reading scale (check magnification accuracy)




demo sample



vise



rotary table



300mm calibration scale (check magnification accuracy together with 50mm reading scale or calibrate measuring accuracy)



printer (only for **ISP-A3000E**)

SPECIFICATION

Code		ISP-W3020		ISP-A3000E	
Edge detector		not included		included	
Lens	magnification	10X (included)	20X (**optional**)	50X (**optional**)	100X (**optional**)
	view field	Ø30mm	Ø15mm	Ø6mm	Ø3mm
	working distance	77.7mm	44.3mm	38.4mm	25.3mm
Magnification accuracy		±0.08%			
Projector screen		diameter: Ø300mm			
		rotation range: 0°~360°, resolution: 1" or 0.01°			
		reference lines: cross-hairs			
Stage	metal stage size	400×150mm			
	turning range	±15°			
	X-Z stage travel	range: 200×100mm			
		resolution: 0.5μm			
		accuracy: (4+L/25)μm L is the measuring length in mm			
	Y (focus) travel range	75mm			
	max. load capacity	50kg			
Illumination		contour illumination: 24V/150W halogen lamp, brightness is adjustable			
		surface illumination: 24V/150W halogen lamp (with 2 fibers), position is adjustable			
Data processing unit	display	X-Z stage travel, screen rotation			
	output	RS232C		RS232C, USB (data output to Excel and CAD)	
	function	measure coordinate of point measure coordinate of line measure center coordinate, radius of circle with three points measure distance between two objects measure angle with four points or two lines set origin of coordinate coordinate transform set midpoint of coordinate		measure coordinate of point measure coordinate of line measure center coordinate, radius of circle with three points measure distance between two objects measure angle with four points or two lines coordinate transform choose measurement object automatically according to the selective point and display the result	
	advanced function	—		programming for batch measurements	
Power supply		110/220V, 50/60Hz			
Dimension (L×W×H)		830×1090×1010mm			
Weight		160kg			

STANDARD DELIVERY

Main unit	1 pc
10X lens	1 pc
Overlay chart clip	4 pcs
Foot-switch	1 pc
Anti-dust cover	1 pc
Software (only for ISP-A3000E) and USB cable	1 pc

OPTIONAL ACCESSORY

20X lens	ISP-A3000-LENS20X
50X lens	ISP-A3000-LENS50X
100X lens	ISP-A3000-LENS100X
Overlay chart	ISP-A1000-CHART
50mm reading scale	ISP-A1000-SCALE50
300mm calibration scale	ISP-A1000-RULE

Swivel center support (for ISP-A3000E/ISP-W3020)	ISP-A3000-SUPPORT
Demo sample	ISP-A1000-DEMO
V-block with clamp	ISP-A3000-VBLOCK
Rotary table	ISP-A3000-RTABLE
Vise	ISP-A3000-VISE
Printer (only for ISP-A3000E)	ISP-A1000-PRINTER