
BORE GAUGES FOR SMALL HOLES

ATTENTION: NOT SUITABLE FOR 0.001MM DIAL INDICATORS





2852-10

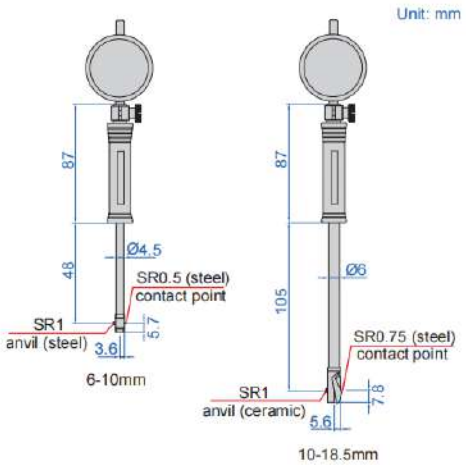

2152-18 **2152-18WP**



- Optional accessory: setting ring (code **6312**), bore gauge setter


With dial indicator

Code	Range	Indicator	Accuracy	Repeatability
2852-10	6-10mm	dial indicator, range 3mm, graduation 0.01mm (code **2311-3F**)	±0.012mm	0.003mm
2852-18	10-18.5mm		±0.012mm	0.003mm

With digital indicator (data output cable code 7315-51B page 5, **7302-40M** page 13, **optional)**

Code	Range	Indicator	Accuracy	Repeatability
2152-10	6-10mm	digital indicator, code **2108-10F**, range 12.7mm/0.5", resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.012mm	0.003mm
2152-18	10-18.5mm		±0.012mm	0.003mm

with digital indicator

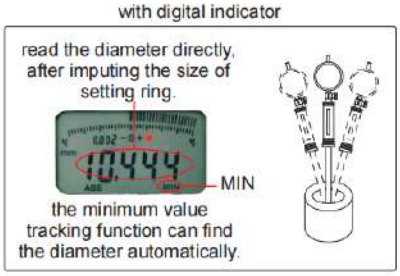

With waterproof digital indicator (data output cable code 7315-51B page 5, **7302-40M** page 13, **optional)**

Code	Range	Indicator	Accuracy	Repeatability
2152-10WP	6-10mm	waterproof digital indicator, code **2137-10F**, range 12.7mm/0.5", dust/waterproof IP54, resolution 0.002mm/0.0001" (can switch to 0.01mm/0.0005")	±0.012mm	0.003mm
2152-18WP	10-18.5mm		±0.012mm	0.003mm

with waterproof digital indicator

