
DIGITAL GEAR TOOTH MICROMETERS


IP65 WATERPROOF

DATA OUTPUT

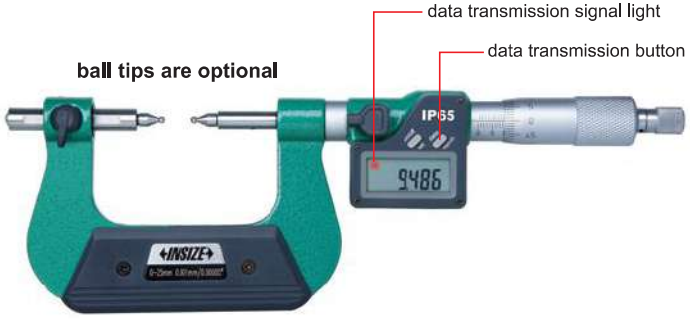


3591-25A

- Measure over-pin diameter of gears
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Supplied with setting standards (except 0-25mm/0-1")
- Power:
  with data interface: CR2032
  built-in wireless: rechargeable lithium battery
- Optional accessory: ball tips (code **7391**)

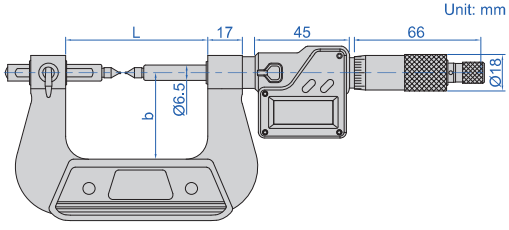

With data interface (data output cable code 7315-31 need receiver page 4, **7302-31** page 12, **optional)** **(mm)**

Code	Range	Accuracy	L	b
3591-25A	0-25mm/0-1"	±4μm	67	38
3591-50A	25-50mm/1-2"	±4μm	92.4	50
3591-75A	50-75mm/2-3"	±5μm	117.6	62
3591-100A	75-100mm/3-4"	±5μm	143	70
3591-125A	100-125mm/4-5"	±6μm	168.2	82
3591-150A	125-150mm/5-6"	±6μm	192	94.5
3591-175A	150-175mm/6-7"	±7μm	217	107
3591-200A	175-200mm/7-8"	±7μm	242	130
3591-225A	200-225mm/8-9"	±8μm	267	142.5
3591-250A	225-250mm/9-10"	±8μm	292	155
3591-275A	250-275mm/10-11"	±9μm	317	167.5



Built-in wireless (receiver code 7315-2/3/6/7/8/9 is required)

Code
3591-□□□□WL

Code examples:

Original code	Wireless code
3591-25A	3591-25AWL
3591-50A	3591-50AWL